




116087




EPC Class1 Gen2
 ISO18000-6C
 UHF866-868MHz (EU)
 UHF902-928MHz (US)
 UHF920-925MHz (CN)




9 / 6
 4.5 / 2.5



EPC 128bits
 TID 96bits
 User 64bits

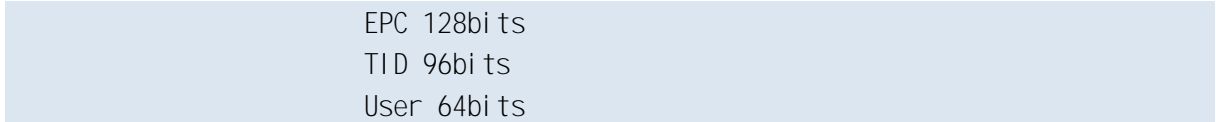

PC
 PC



mm 87*24*11mm 5mm
 19g





常州高特
GAO RFID Inc.
Members of GAO Group



-30° C to +75° C
IP / IP67

MILSTD810-F
CE approved RoHS approved ATEX/IECExcertified

